User Manual for iOS App

Shenzhen Foscam Intelligent Technology Co.,Ltd.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

Table of Contents

Table of Contents....1
1 Overview....2
2 Access the IP Camera....2
3 Install App....2
4 Introduction to IPCam Management Page....2
5 Add Cameras to App....3
5.1 Add Cameras in LAN....3
5.2 Add Cameras by QR Code....6
5.3 Add Cameras Manually....8
5.4 Foscam Demo....12
6 Video....13
6.1 View Camera Video....13
6.2 Set the Video Operation....14
6.3 Configure the camera....18
6.3.1 Edit....19
6.3.2 Modify the Username/Password....19
6.3.3 PTZ....20
6.3.4 Wireless network....23
6.3.5 Enable Push Message....24
6.3.6 IR LED Schedule....24
7 Message....24
8 Media....25
9 Others....25
10 Technical support....27

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

1 Overview

FOSCAM provides iOS App for iOS users, which helps to view and listen to your world anywhere anytime. The following steps will show you how to setup App and enjoy it.

2 Access the IP Camera

Before adding cameras to the App, please setup the camera and ensure you can connect camera in LAN or WAN according to Quick Installation Guide.

3 Install App

Search and install **Foscam Viewer** in the App Store. Note that the publisher is Foscam. Then you will see the shortcut icon on the device screen.

4 Introduction to IPCam Management Page

Run the App, at the first time, you will see this guidance page. You can slide left to glance these guidance, and you can see these info in More - Help page later.

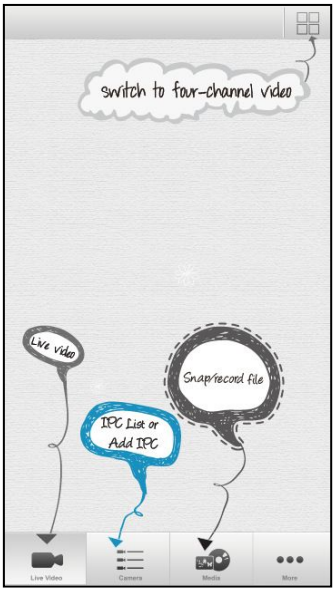

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

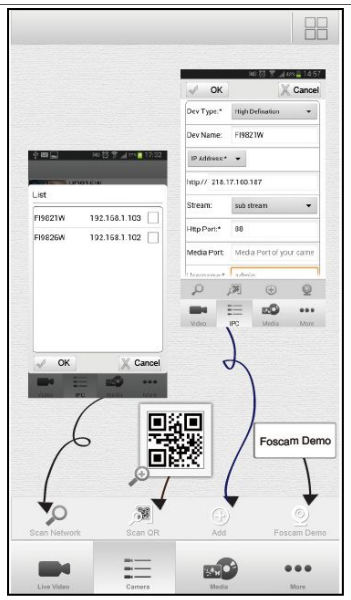

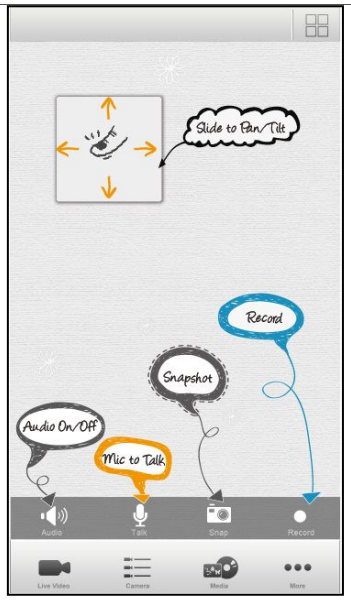

5 Add Cameras to App

Click **Enjoy** to enter App, there are four ways to add camera in **IPC** tab.

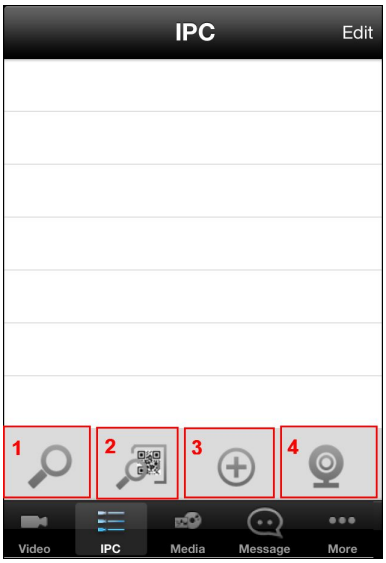

5.1 Add Cameras in LAN

Step1: Tap Search Button to scan all cameras in LAN. Choose the camera you want to add and click "Add", the camera can be added to the IPC list.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

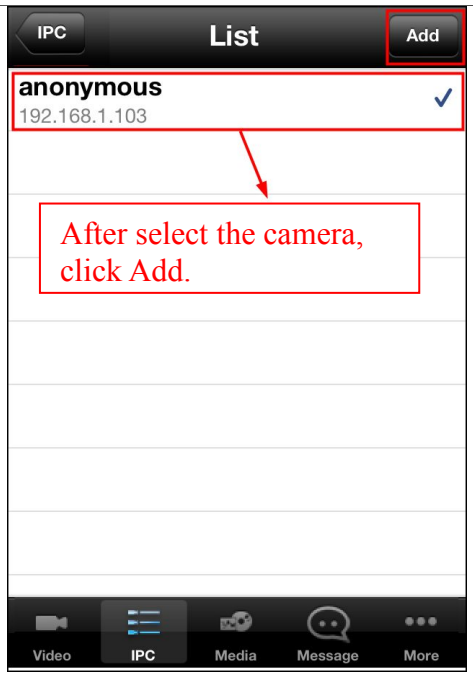

After successfully adding cameras, the prompt of add successfully will appear.

Step2: Click **IPC**, back to the IPC list page. Choose the camera you want to connect.

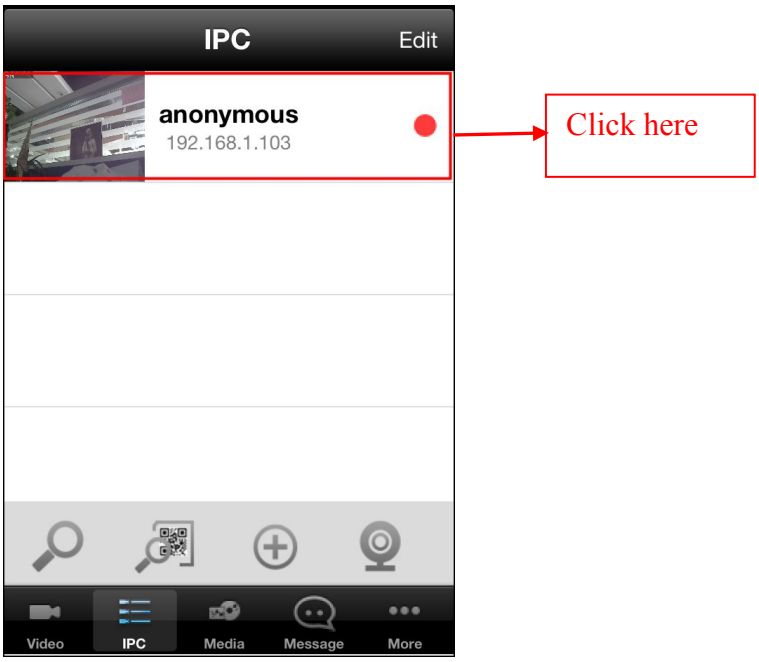

Step3: Input the **Username** and **Password**(the default username: admin, no password by default), then click **save**.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

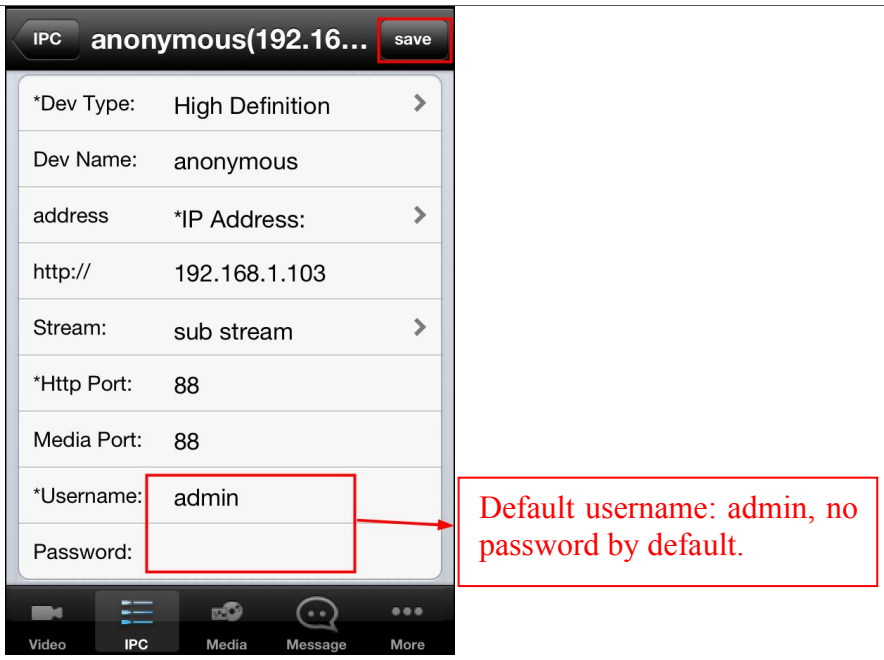

Step4: Click **IPC**, back to the IPC list page. Choose the camera you want to connect.

- If the **Username** and **Password** of your camera are all default, the page of modifying the Username and Password appears.
- If you have modified the Username and Password, the page that connect to the video appears.

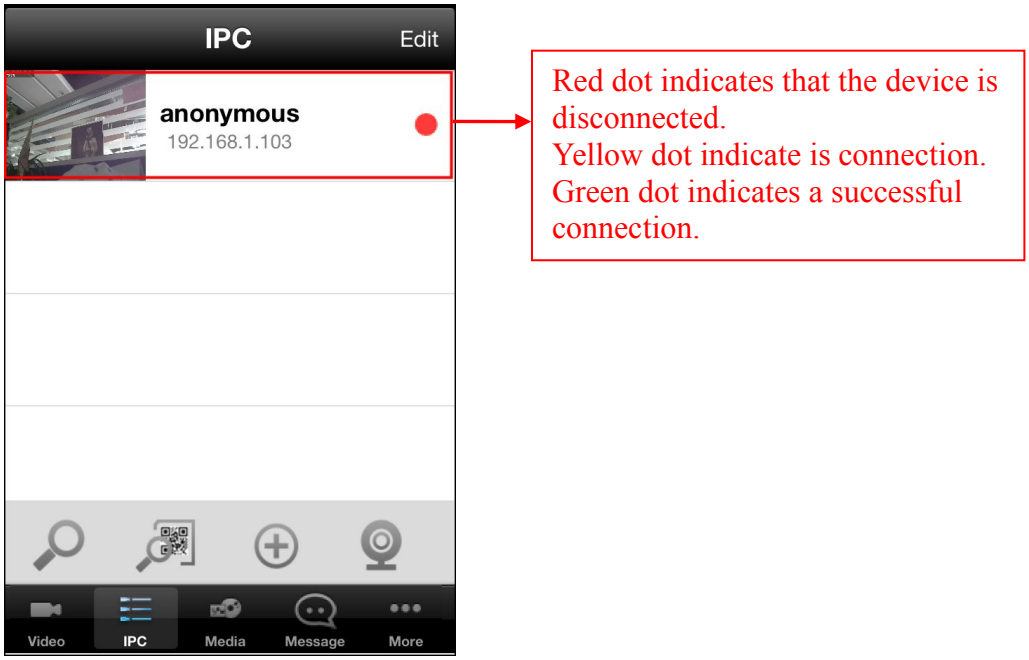

Step5：Modify the Username and Password(If you have modified the Username and Password, you can do not perform this step.)

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

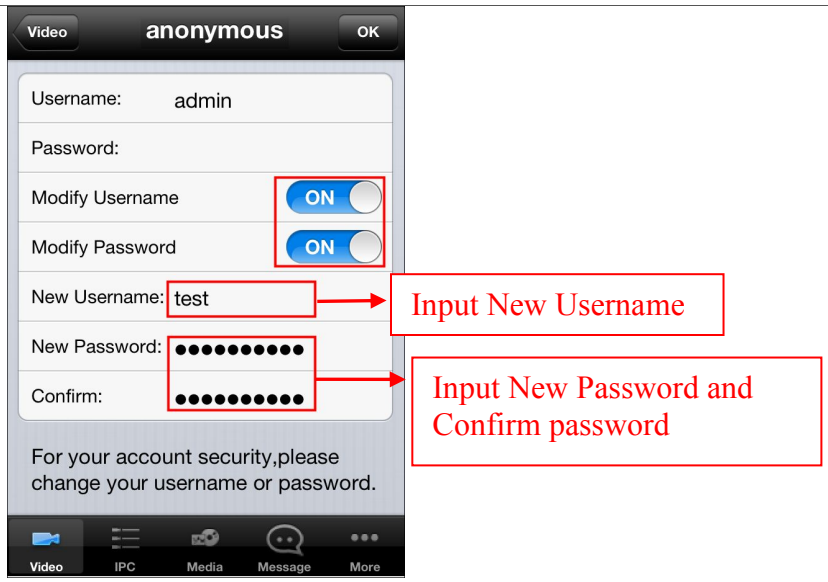

Click **OK**, then click **Video**, back to the IPC list page. Perform the step4 to connect the camera.

5.2 Add Cameras by QR Code

Only P2P cameras support this way.

Step1: Tap the icon, your phone will go into QR code scanning mode. Scan the QR code on the bottom of the camera.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

Step2: When you finish the QR code scanning, the App will pop-up device information page automatically, you can input the Device Name (used to distinguish the camera on your phone), the Username and Password (the default username: admin, no password by default). Click **OK**.

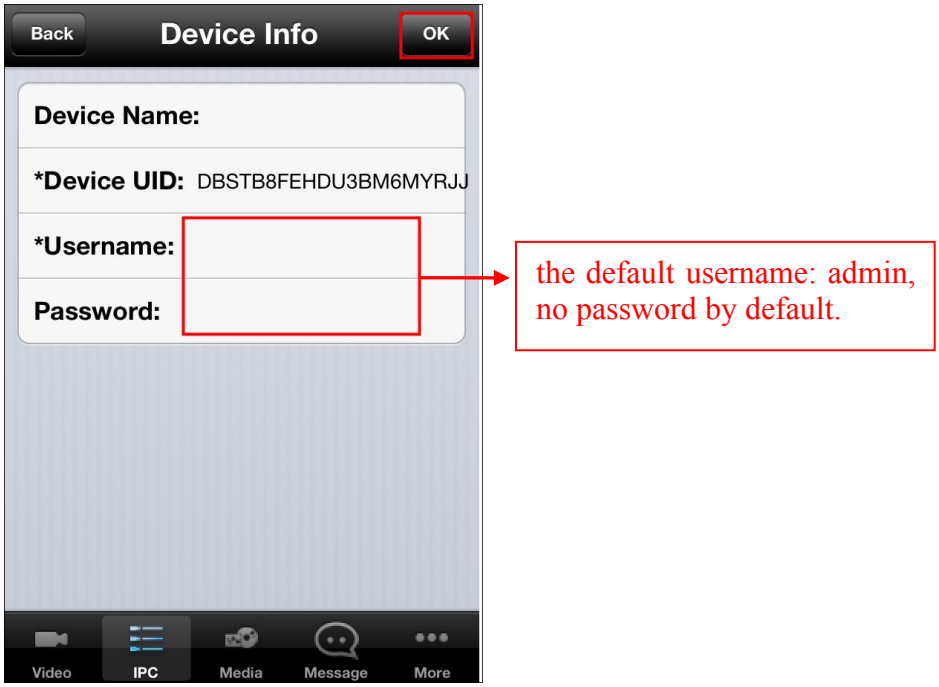

Step3: Click **Back**, back to the IPC list page. Choose the camera you want to connect.

- If the **Username** and **Password** of your camera are all default, the page of modifying the Username and Password appears.
- If you have modified the Username and Password, the page that connect to the video appears.

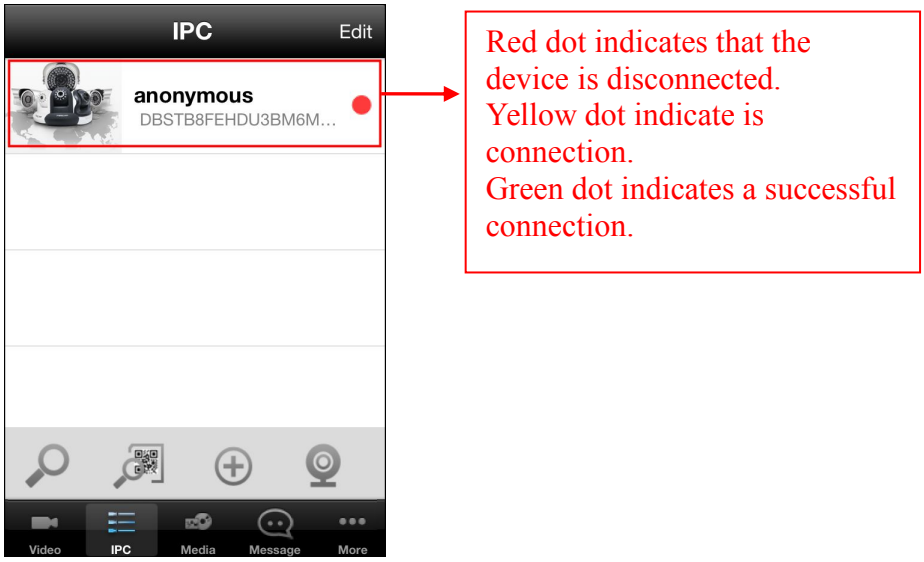

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

Step4: Modify the Username and Password(If you have modified the Username and Password, you can do not perform this step.)

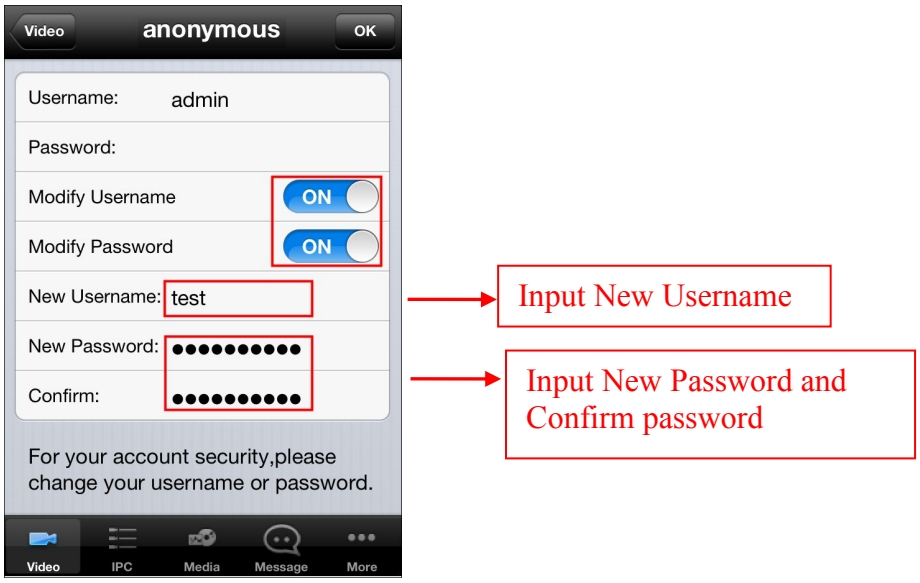

Click **OK**, then click **Video**, back to the IPC list page. Perform the step3 to connect the camera.

5.3 Add Cameras Manually

Step1：Tap the button , and add the camera manually, the camera can be added by IP Address, DDNS URL and P2P UID.

① **IP Address**

Select Device Type, input the Device Name, IP Address, choose the main stream or sub stream, input Http Port, Media Port, Username and Password (the default username: admin, no password by default). Click **Add**.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

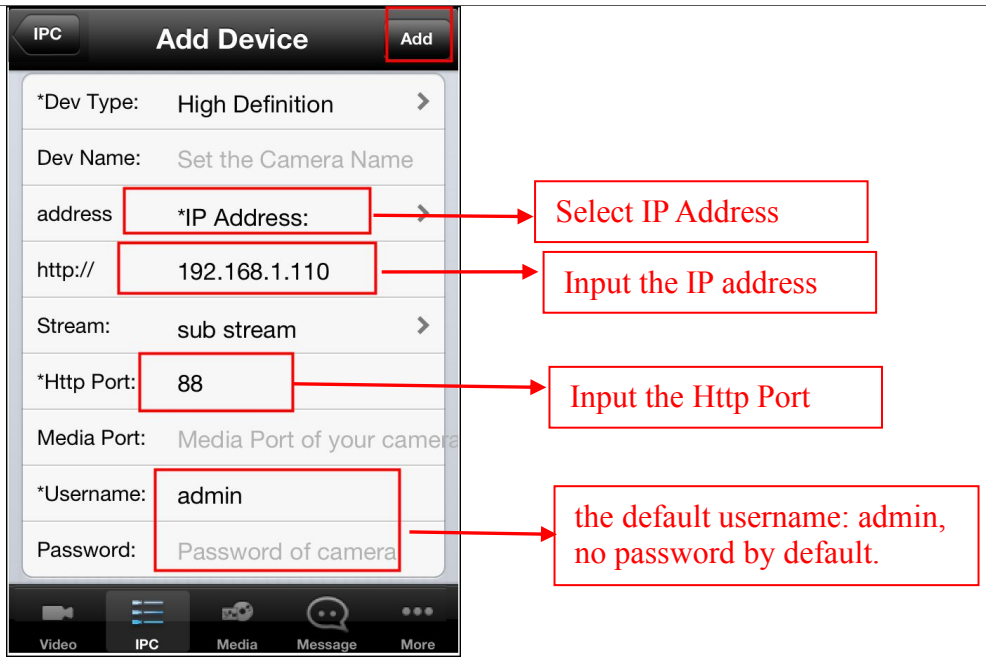

Note: You can get the IP address and Http Port of the camera as follow way.

Insert the CD into the CD drive of your computer. Go to the folder “IP Camera Search Tool” and find the folder “For Windows OS” or “For Mac OS”. Copy and paste the IP Camera Tool file to your computer, or drag it onto your desktop.

Open the IP Camera Tool, it should display the camera’s IP address and http port in your local area network.

② DDNS URL

Make sure you can access your camera through Internet by DDNS, then you can follow the QIG to setup DDNS and port forwarding. Select Device Type, input the Device Name, DDNS URL, choose the main stream or sub stream, input the UID NO.,Username and Password (the default username: admin, no password by default). Click **Add**.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

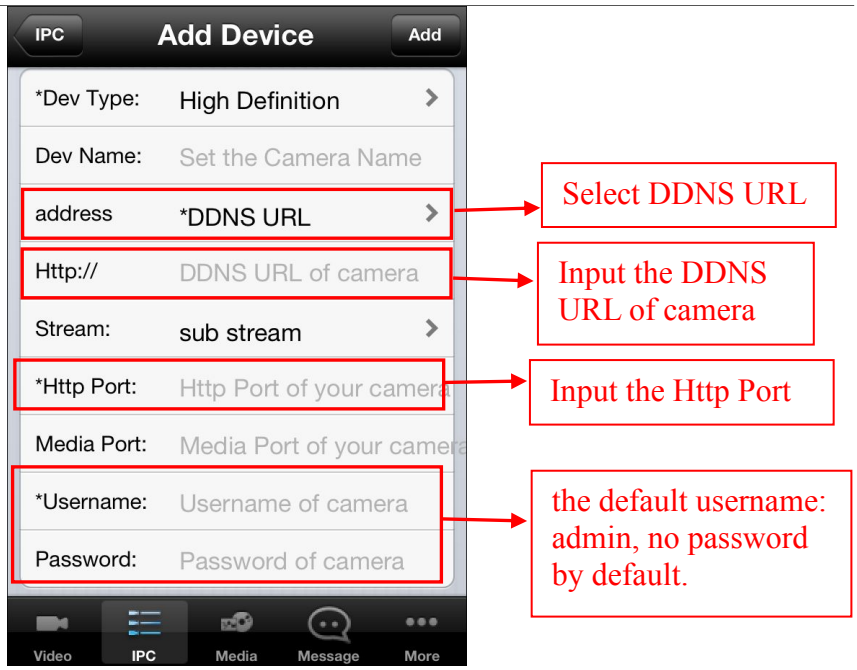

③ P2P UID

Select Device Type, input the Device Name, P2P UID on the bottom label of your camera, choose the main stream or sub stream, input the UID NO.,Username and Password (the default username: admin, no password by default). Click **Add**.

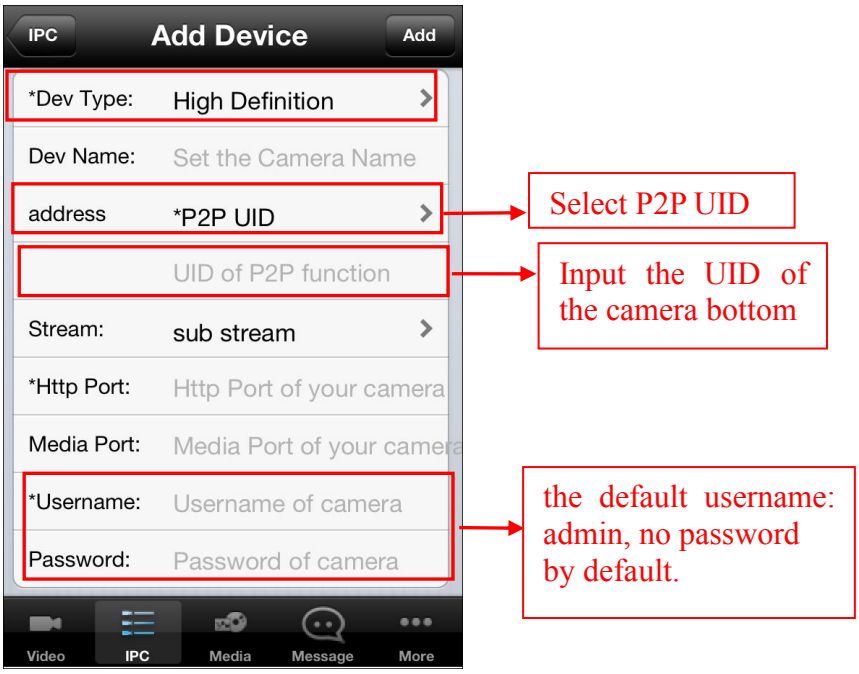

Notes：

- The High Definition and Standard Definition models use different coding, you should

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

select one first.

- If your bandwidth is sufficient, you can choose main stream to view clearer video, if your bandwidth is limited, such as on 3G or LTE, you can choose sub stream to view more smooth video.
- The Device Name here is just used to distinguish the camera on your phone, won't modify the camera name of your IPC.
- Foscam SD cameras and new HD cameras just have HTTP Port, only FI9801W, FI9802W, FI9818W and FI9821W have Media Port.

Step2: Click **IPC**, back to the IPC list page. Choose the camera you want to connect.

- If the **Username** and **Password** of your camera are all default, the page of modifying the Username and Password appears.
- If you have modified the Username and Password, the page that connect to the video appears.

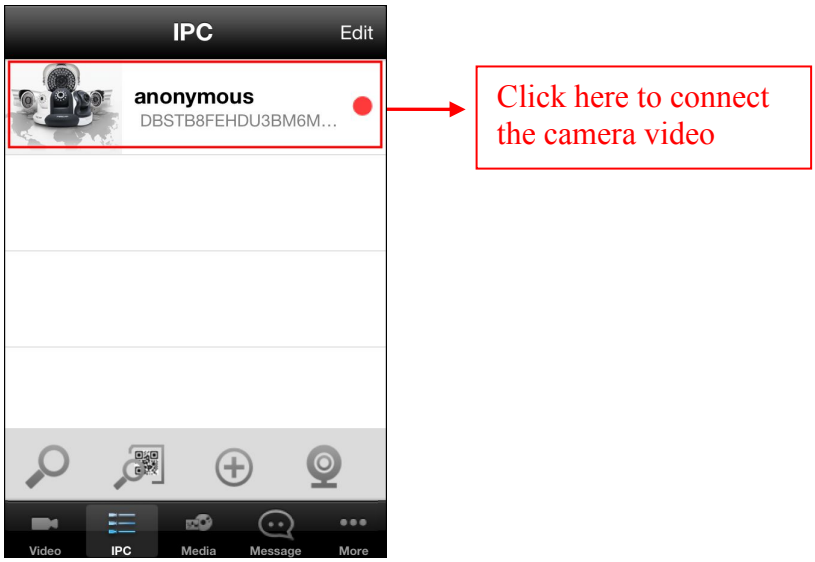

Note: Red dot indicates that the device is disconnected. Yellow dot indicate is connection. Green dot indicates a successful connection.

Step3：Modify the Username and Password(If you have modified the Username and Password, you can do not perform this step.)

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

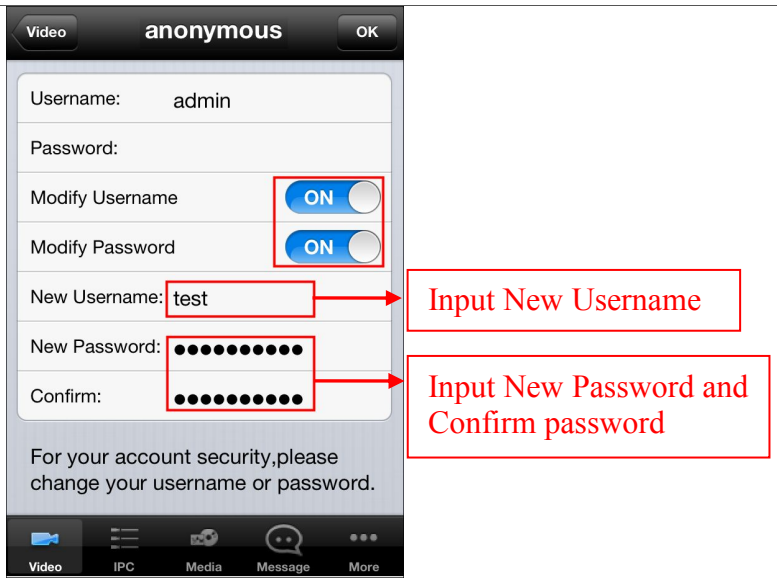

Click **OK**, then click **Video**, back to the IPC list page. Perform the step4 to connect the camera.

5.4 Foscam Demo

You can add the Foscam Demo to IPC list directly, and check the live video on your phone, you don't need to input username or password.

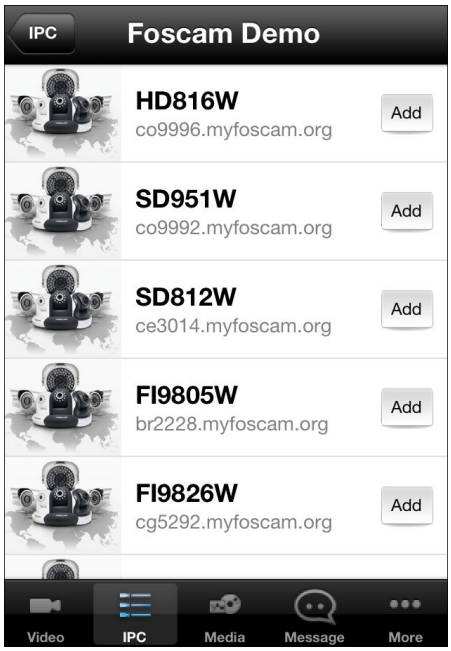

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

6 Video

6.1 View Camera Video

Tap the **Video** icon on the bottom, you can go to live video page. Tap the icon on the upper-right corner, you can switch single and four-channel display.

Tap the "+" button, you can add camera which have been added.

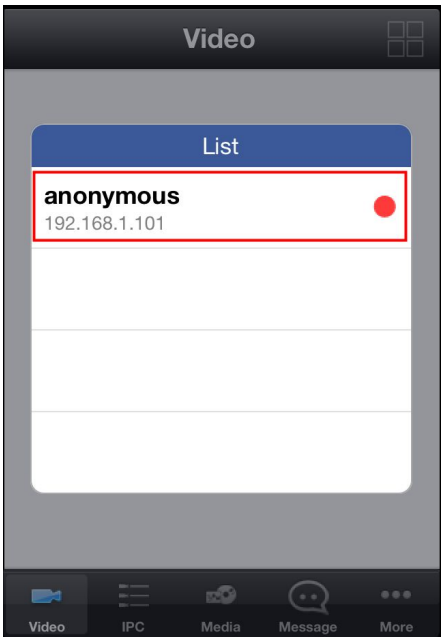

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

After connecting the camera is successful, the camera video will appear.

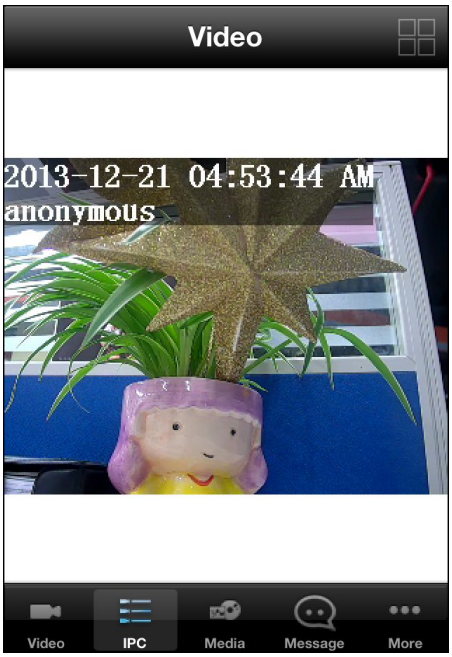

In four-channel mode, double tap the video can switch to single channel mode, double tap again, you can enter the full screen mode. In video page, place your phone in landscape mode, you can enter full screen mode, place your phone in portrait mode to exit full screen mode.

6.2 Set the Video Operation

Tap the live video and the operation button will pop up.

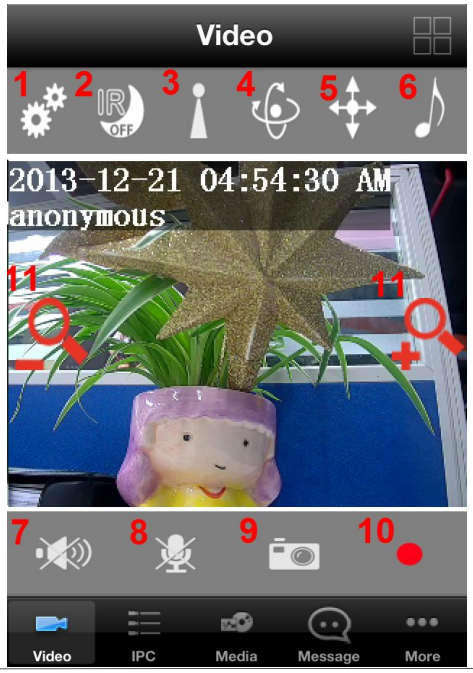

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

The video interface supports the following functions:

1: Configure the camera

It contains **Edit**, **Modify the Username/Password**, **PTZ**, **Wireless network**, **Enable Push Message** and **IR LED Schedule**. Please refer to the "6.3 Configure the camera".

2: Turn on/off IR Light

Click icon , the **Operation** page will display. There are two modes to adjust the infrared led: Auto and Manual.

When the **IR LED Schedule** is **Manual** mode on the **Operation** page, you can click icon to turn on or turn off the infra led manually on the Video page.

3: Preset

Some products support Preset function.

Click icon, you can add or delete the preset of the camera. And make the camera go to the preset position.

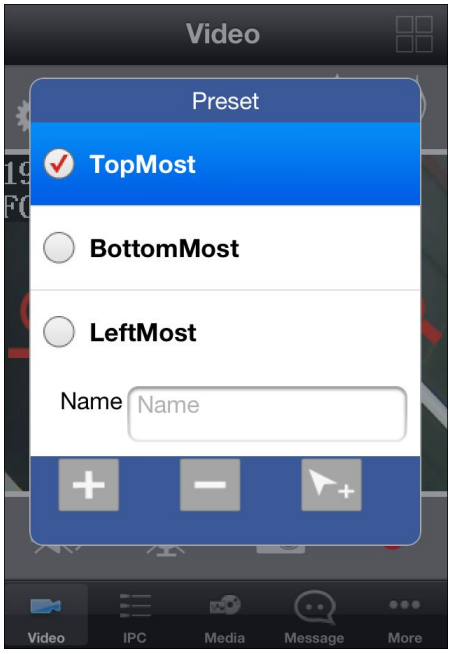

- **Add Preset**: Move the camera and stop at a desired place where you want make preset position. Input a descriptive name for the preset position. Click button save it.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

- **Go to the Preset**: Select one preset position in the preset drop-down list and click to make the camera move the preset position.
- **Delete Preset**: Select one preset position and click to delete it.

NOTE:

The default preset can not be deleted.

4: Cruise Track

Some products support cruise track function.

Click icon, you can select the cruise track.

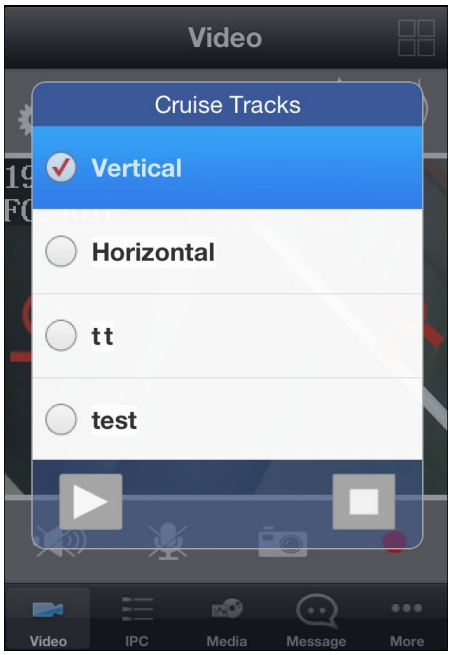

Select one track in the track drop-down list. Click button, the camera will cruise following the predefined path. Click stop button and finish cruising.

5: PTZ

Some products support PTZ function.

Click the icon , then click on the arrow keys to operate the camera.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

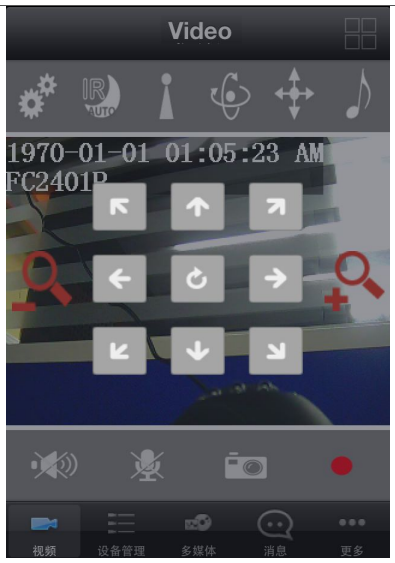

6: Play nursery rhymes

The Fosbaby machine supports this function.

Click the icon , then click the icon to play the nursery rhymes, click the icon to stop the nursery rhymes, click the icon to play the previous song, click the icon to play the next song.

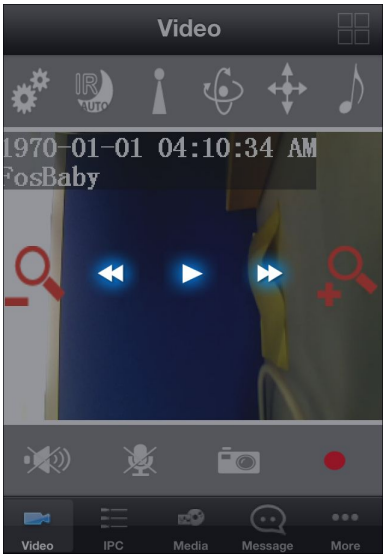

7: Audio

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

Click icon , the icon will become to , you can hear the sound around the camera by the earphone or speakers that connected with PC.
Some products support Audio function.

8 : Talk

Click icon and the icon will become to , then talk to the microphone that connected with PC, people around the camera can here your voice. Click the icon again and stop talking.
Some products support Talk function.

9 : Snapshot

Click it to make snapshot and it pop-up a window which picture you snapshot, right click in the window and save the picture to anywhere you want.
The picture of the snapshot will be stored in the “Media > Snapshot”.

10 : Recording

Click icon and the camera start recording.
Click icon and the camera stop recording.
The default storage path is “Media > Video Record”.

11 : Zoom

Some products support zoom function.
You can make digital zoom by pinch-to-zoom.

- Tap the button on the right to magnify image.
- Tap the button on the left to Reduced image.

6.3 Configure the camera

Click icon , the **Operation** page will display.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

6.3.1 Edit

Click **Edit**, you can modify the IPC information.

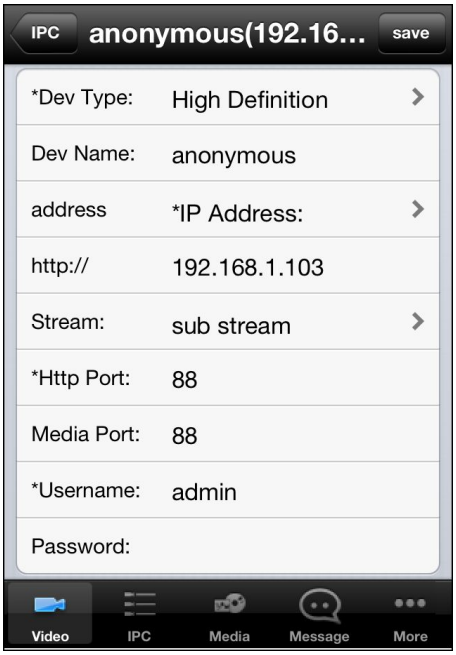

6.3.2 Modify the Username/Password

Click **Modify the Username/Password**, you can change username and password of the camera.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

6.3.3 PTZ

Click **PTZ**, you can set the **PTZ Speed**, **Start-Up-Option** and **Cruise Settings** of the camera.

PTZ Speed

There are five PT speed types: very fast, fast, normal, slow and very slowly. Select the desired PTZ speed type.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

Start-Up-Option

It supports three modes: Disable Start-Up, Go To Home Position and Go To Preset Point.

- Disable Start-up: When rebooting, the camera will not pan/tilt.
- Go To Home Position: When rebooting, the camera will pan/tilt and stops at center.
- Go To Preset Position: Select one preset position and save it. When rebooting, the camera will pan/ tilt and stops at the preset position you have set.

Cruise Settings

You can add/ delete/ alter one cruise track.

You can click the icon to take effect on the Video page.

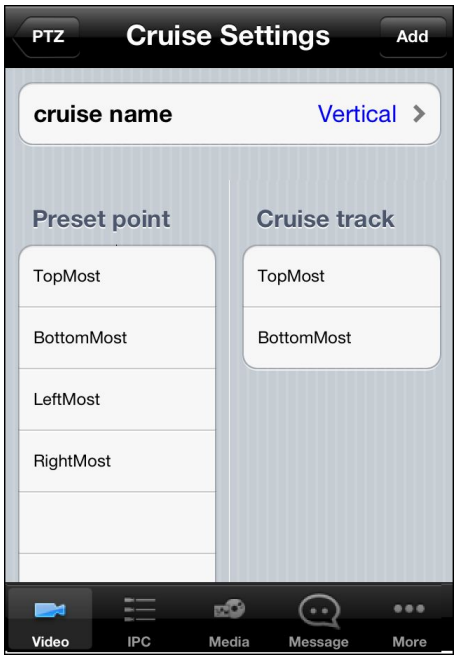

- Add Cruise Track

Click Add button and enter a descriptive name to identify the cruise track.

On the lower left of the page, you can see all preset points you have added. Select one preset point and click button, you can see the preset point has been added to the cruise track on the cruise track page. You need to add two or more preset points to the cruise track.

Click **OK** button and the cruise track will take effect.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

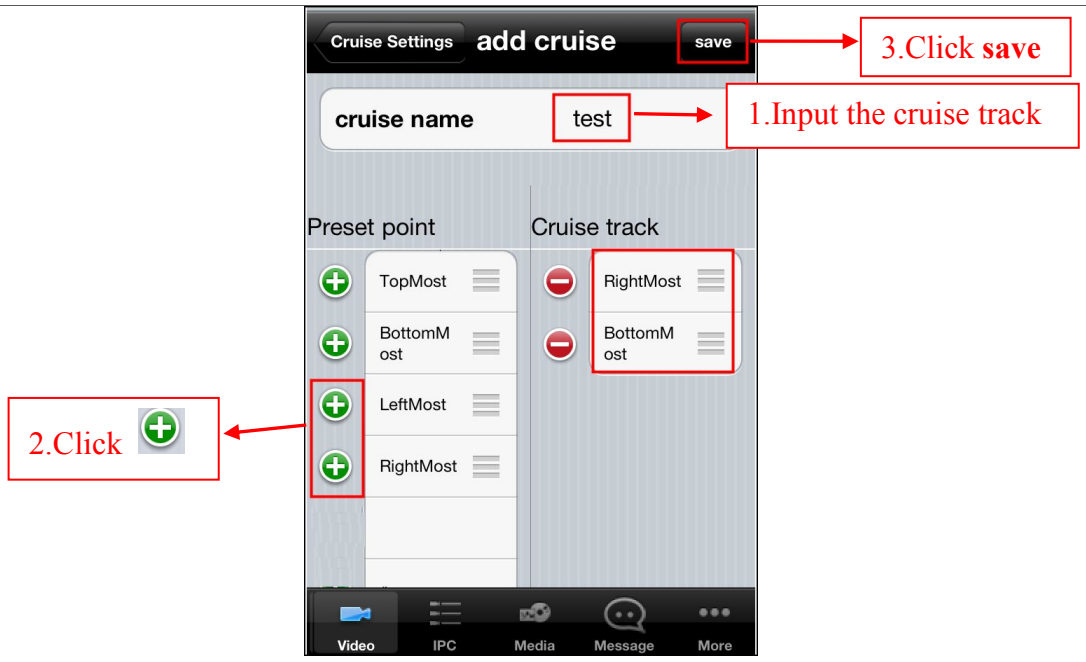

- Check Cruise track

After add the cruise track, you can see all cruise tracks you have added from the **Cruise track** dropdown.

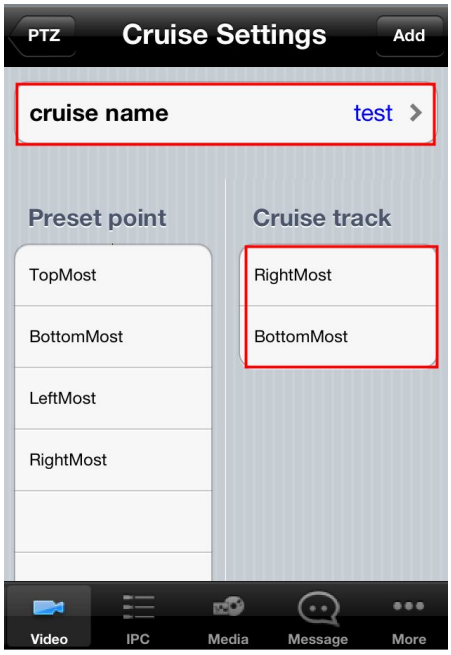

- Delete Cruise Track

Select one cruise name you have added, slide the **cruise name** to delete.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

6.3.4 Wireless network

You can set wireless connection of the IP Camera.

1. On the **Operation** page, click **Wireless network** to enter the **Wifi list** page.

2. Select the wifi network, then input the SSID, Encryption and Password. Click **Save** to finish wireless connection.

3. So far, you can disconnect the network cable.
   You can back the video to check the wireless connection of the IP Camera.

If you do not find the wireless network, you can click the **Input to add camera** to add wireless network manually.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

6.3.5 Enable Push Message

After enabling push message, your phone can get the system message and alarm message of the IP Camera. You can also see the push message on the **Message** page.
On the **Operation** page, you can enable/disable the push message.

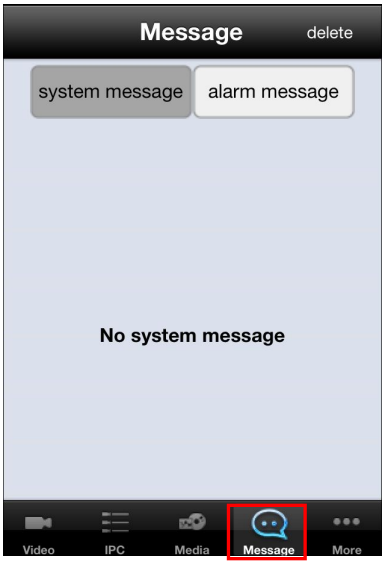

6.3.6 IR LED Schedule

On the **Operation** page, you can set infrared led mode: Auto and Manual.
AUTO: Auto mode, select it and the camera will adjust the infra led (on or off) automatically.

: Manual mode, select it and you can turn on or turn off the infra led manually by icon IR OFF the on the Video page.

7 Message

Tap the "Message" on the bottom to enter **Message** page.
You can see the system message and alarm message of the IP Camera.

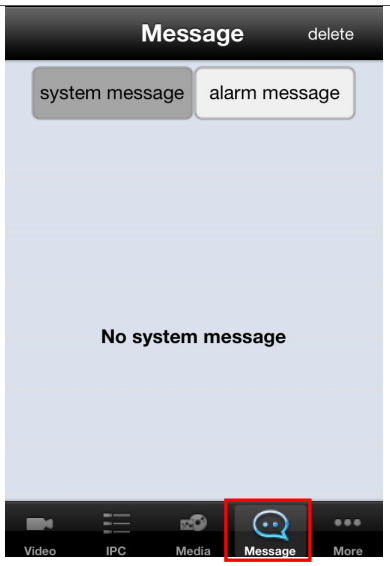

8 Media

Tap the "Media" on the bottom to enter **Media** page.

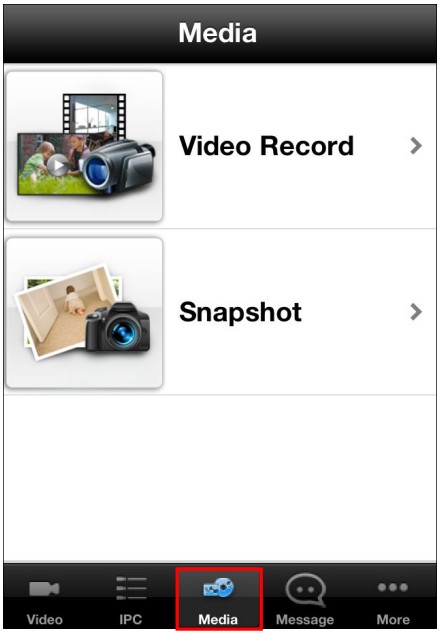

9 Others

Tap "**More**" on the bottom to get more information about the App.

Shenzhen Foscam Intelligent Technology Co., Limited
Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

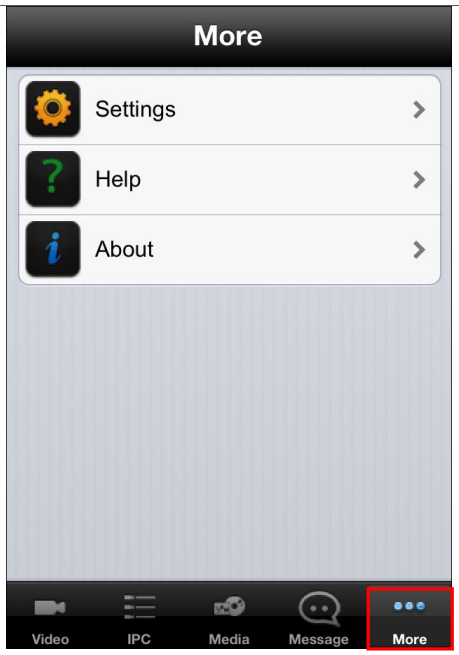

Settings

Tap **Settings**, you can enable/disable **Only connect in Wi-Fi network**. It is enabled by default to avoid too much mobile data in 3G/LTE network.

You can enable/disable **Enable Push Message Sound Notification**.

Click the **Share Management**, you can share your snap picture.

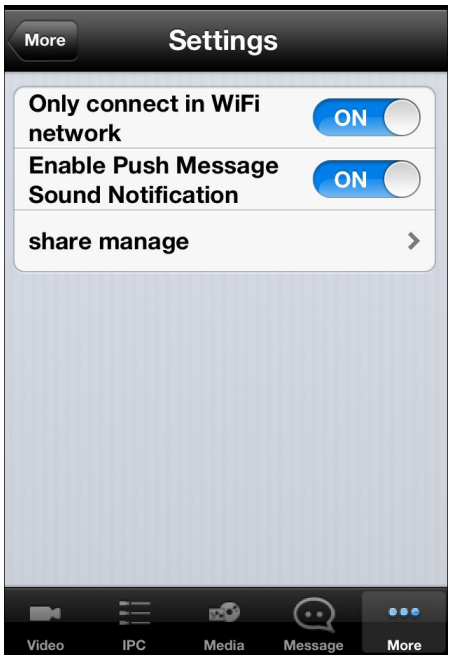

Help

Tap "Help", you can see the help info showed when the App run at first time.

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168

About FOSCAM App

Tap "About", you can get the software version information. When the App has update version, the App Store will remind you.

10 Technical support

If you have problems with your Foscam IP camera, please contact the Foscam reseller you purchased from, or you can e-mail the Foscam headquarter technical support team: **tech@foscam.com** .
Your valuable comments and suggestions on improving Foscam products are welcomed!

Shenzhen Foscam Intelligent Technology Co., Limited

Tel: 86 755 2674 5668 Fax: 86 755 2674 5168